


AP-SG25 Series

Specifications & Capacities

| Model Numbers                       | AP-SG2572  | AP-SG2584 |
|-------------------------------------|--|-----------|
| Working width                       | 72"  | 84"       |
| Overall width                       | 81 1/4"  | 93 1/4"   |
| Number of straight shanks           | 6  | 7         |
| Skid steer & tractor hp requirement | 40-95 hp   | 40-95 hp  |
| Unit weight with shanks             | 886 lbs.   | 952 lbs.  |
| Overall length                      | 52 1/4"  |           |
| Overall height                      | 22"  |           |
| Side panel height with skid shoes   | 15 1/2"  |           |
| Side panel length                   | 50"  |           |
| Side panel thickness                | 1/4" Thick with 2 3/4" formed edges.   |           |
| Skid shoe construction              | 3/8" Thick with a formed bevel to prevent gouging.                                   |           |
| Straight shank construction         | Heat-treated 3-position shank.   |           |
| Cutting edges                       | Four 1/2" x 6" high-carbon, heat-treated blades that are reversible and replaceable. |           |
| Cutting edge adjustment             | Variable vertical adjustment from level grade to 1 1/2" below grade.                 |           |
| Shank adjustments                   | 2 1/2" and 3/4" below grade level.<br>3/4" above grade level.                        |           |
| Hitch type                          | Skid steer mounting plate  |           |

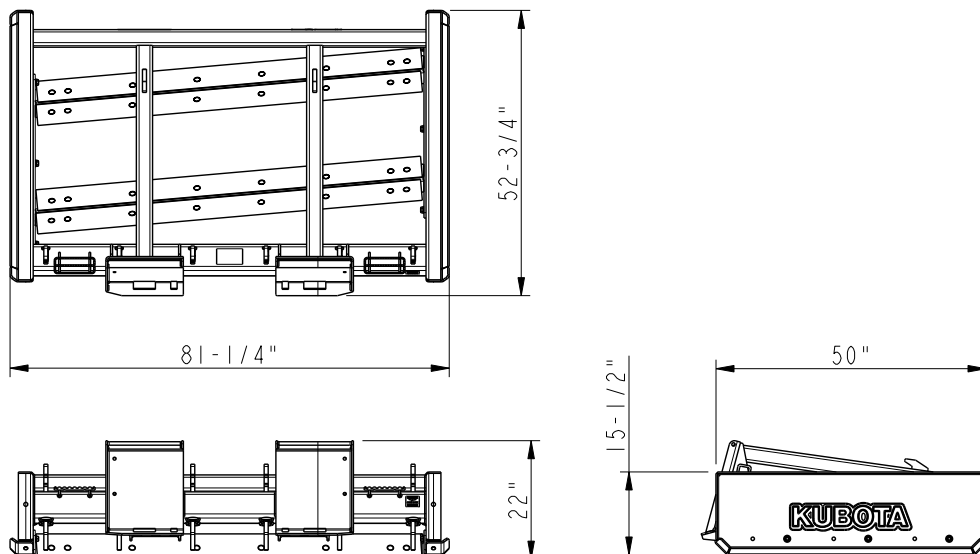

39346